

# HOW TO MEASURE SINGLE TOUCH MINI BLINDS



## MEASURING WIDTH & LENGTH FOR INSIDE MOUNT (IM)


**Depth Required:** 1¼"

**Width:** Measure across the top, middle and bottom of window frame record the narrowest size to the nearest 1/8"

**Length:** Measure the up & down dimensions on the left, center and right side of the window frame and record the longest size to the nearest 1/8"

**DO NOT MAKE ANY WIDTH DEDUCTIONS. OUR FACTORY WILL MAKE THE APPROPRIATE DEDUCTIONS (¼(+/-1/8") FACTORY DEDUCTION WILL ACCOMMODATE BRACKETS AND PROPER BLIND FUNCTION.**

## INSIDE MOUNT

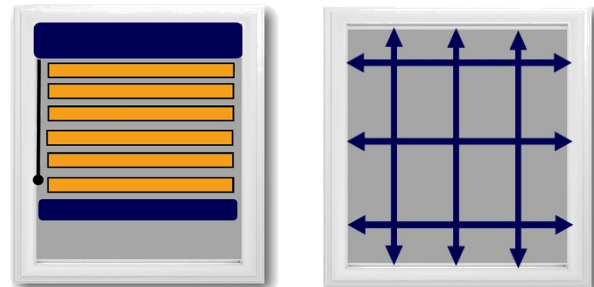

[Measuring Worksheet](#)

## OUTSIDE MOUNT


Outside mount blinds are installed on the wall or on the actual window frame. It is advisable to overlap the window opening on each side for best light gap and privacy when measuring for your blinds.

## MEASURING WIDTH & LENGTH OUTSIDE MOUNT (OM)

Measure the area that your blind will cover. We recommend a minimum of 1 ½ " overlap on each side, for a total of 3", this will allow sufficient space for the mounting brackets & headrail and to cover the bottom of the window. If your window has a sill, measure from where the top of the blind will be installed, to the bottom of the sill, so that your blind will be sufficiently long.

**NOTE:** For outside mount blinds, no factory deduction is made

## OUTSIDE MOUNT

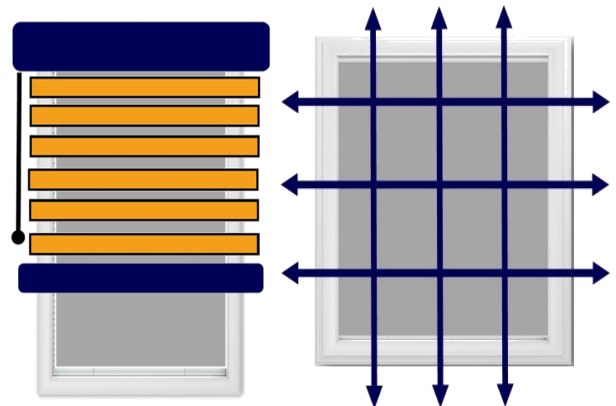

[Measuring Worksheet](#)

## CONFIRM YOU MEASUREMENTS

*The most common error measuring blinds is reversing the width and length measurements. Always confirm that the width is the measurement that goes left to right – horizontal and is listed first, and that the measurement that goes from top to bottom – vertical. List the width first (W x L)*